



E	E	28
N	0	0
(US) 5	110	28
	120	0
	220	110
(UK) 5	240	0

CONTROL TRANS

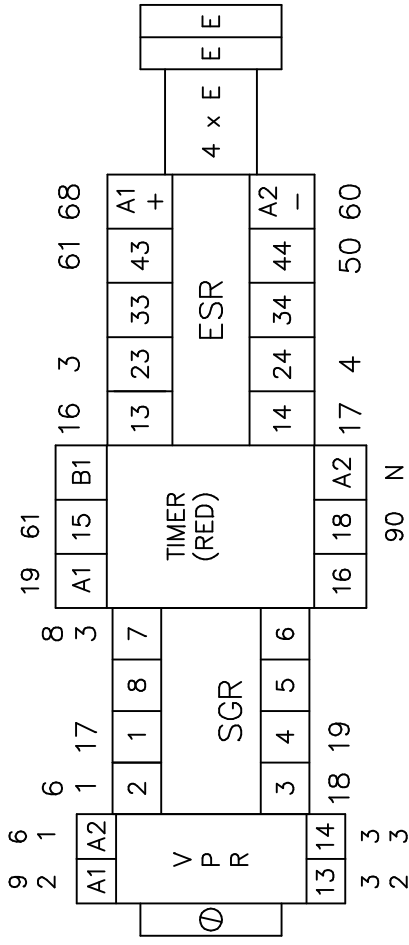


- FUSES ON DINRAIL**
- F1 SPINDLE DRIVE 10 AMP
 - F2 AXIS DRIVE TRANS 6.3 AMP
 - F3 CONTROL TRANS 3.15 AMP
 - F4 110v CIRCUIT 3.15 AMP
 - F5 AXIS DRIVES 6.3 AMP
- FUSES ON COMPONENTS**
- F6 NEXT-STEP BOARD 6.3 AMP

BEAD CAPACITORS
RS 126-590

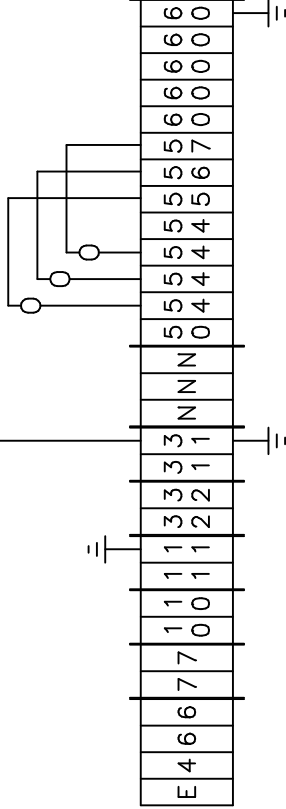

LINK 83 + 84 IF
GUARD INTERLOCK
IS NOT FITTED

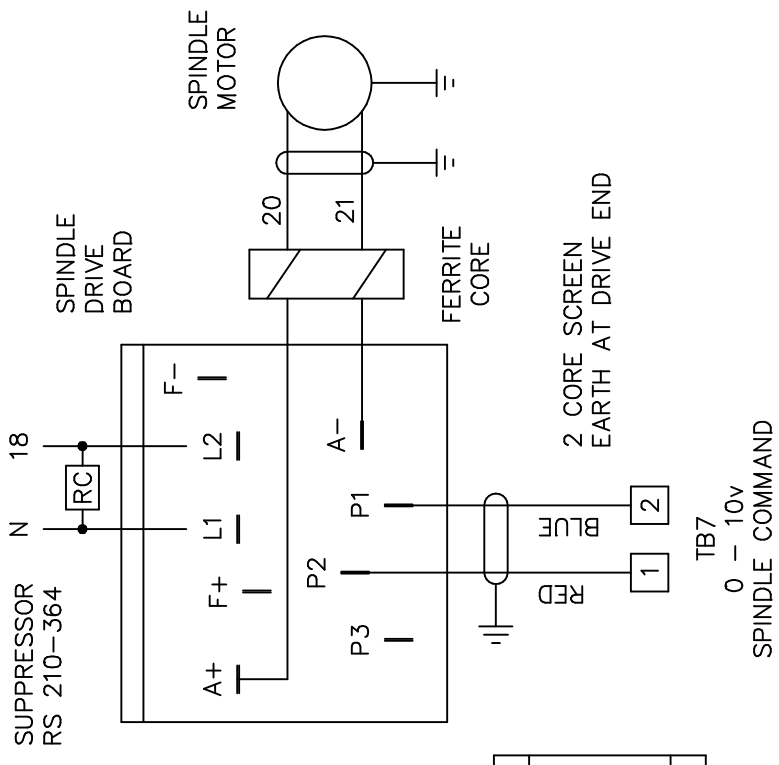

TB7
0 - 10v
SPINDLE COMMAND

MICRO ROUTER PRO RELAY WIRING DETAILS	SHEET 3
	PRO
	N-STEP