



- ① - UNION TO OPERATE WITH FLOATING SEAL ASSEMBLY HEIGHT SET INSIDE INDICATED AREA.
- ② - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1154-002-109.
- ③ - AIR OR AIR/OIL MIST WILL FUNCTION IN A CONTROLLED LEAKAGE CONDITION.

CONFIDENTIAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEULIN COMPANY, COPPING, ILE. TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS GOVERNING OUR AGREEMENT WITH DEULIN COMPANY. ALL RIGHTS RESERVED.			
Ø16.4	H8	-0.027 0	16.427 16.4
Ø13	q4	-0.006 -0.011	12.994 12.989
Ø13	H4	-0.005 0	13.005 13
Dimen.	Fit		

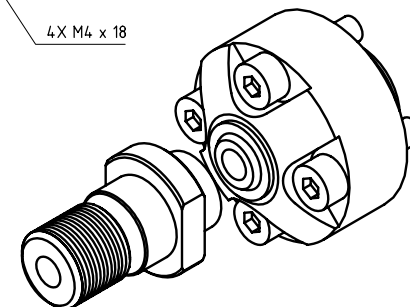

"L" MOUNTING DIM. $\pm 0.25\text{mm}$	"R" WORKING RANGE (REF.)
37mm	8mm
34mm	5mm
32mm	3mm
30mm	1mm

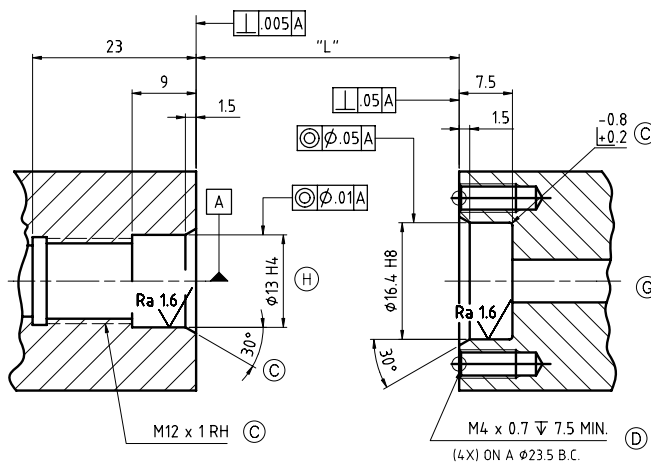

OPERATING DATA			3
MEDIA		COOLANT	MLQ OR AIR
PRESSURE	MAXIMUM	140 bar	10 bar
	MINIMUM	3 bar	3 bar
FLOW RATE	MAXIMUM	24.3 L/min	19.6 NL/sec
	MINIMUM	3 L/min	6 NL/sec
TEMPERATURE	MAXIMUM	71 °C	71 °C
	MINIMUM	5 °C	5 °C
MAXIMUM SPEED		40000 min ⁻¹	40000 min ⁻¹
AXIAL FORCE		3.8 N/bar	
DRY RUN		YES	

